


Model 2210 Single-sided Slide Line

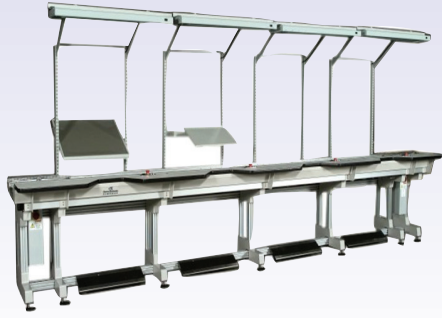

Shown with optional equipment

Standard Features

- Conveying surface inclines 15° towards operator
- Low-friction UHMW product guides
- Precision machined, ESD conveying surface
- Tooled width adjust
- ESD-wrist strap receptacles

Application

The Model 2210 Single-sided Slide Line a low-backpressure, manual conveyance platform commonly used in manual assembly areas. Product is supported by its edges at 3mm or 5mm exposure by two machined, adjustable UHMW guides and manually passed downline.

Typical applications include:

- Platform for product prep
- Platform for inspection or back-end assembly
- Hand insertion

Available Options

- Dual-sided
- Length (4—20 feet)
- 12- or 24-inch width
- Foot Rests, Armrests, and Workstation
- Accessories
- Worktables
- Louvered Part Bin Racks with Handles
- Overhead Florescent Lights
- CE compliance

We welcome custom applications.

Additional Benefits

- Zero-gap edge guides eliminate the danger of product becoming jammed under the edge guide.
- Precision-cut, proprietary aluminum extrusion frame.
- Extruded frame and conveyor rails allow accessories to be easily added and positioned.
- Zero-maintenance design
- Optional workstation accessories can create a comprehensive manual assembly cell